

Rogowski coil set (4 pieces)

111.7030

► Rogowski coil set (4 pieces) for PQ-Box

1. Use

These Rogowski coils are designed for the measurement of current up to 3000A in low voltage systems. Measurements in medium voltage systems with insulated conductors are also possible.



2. Electrical Properties

Rated current I_N	:	4 x 3000A AC _{RMS}
Measurement range	:	1 - 3000A _{RMS}
Output	:	85mV / 1000A at 50 Hz
Internal resistance	:	170 Ω, ± 15 Ω
Impedance	:	≥ 10kΩ
Influence of conductor positioning	:	± 1%
Accuracy (at 25°C, 50Hz)	:	± 0,5%
Linearity (10...100% of measurement range)	:	± 0,2%
Influence el. field (distance > 10cm)	:	± 0,25%
Repeat accuracy	:	± 0,5%
Angle error at 45...65Hz	:	± 1°
Frequency range	:	40Hz to 20kHz
Temperature coefficient	:	0,05% / °C
Permissible voltage	:	1000 V AC _{RMS} , CAT III

3. General Properties

Coil length, diameter	:	4x 400mm, 125mm
Coil body diameter	:	8,3mm
Coil material	:	Thermoplastic UL94-V0
Connection	:	Cable with Amphenol plug C01630H00611012
Identification resistance	:	> 100 MOhm
Cable length	:	2 m
Operation temperature	:	-30 to +80 °C
Storage temperature	:	-40 to +80 °C
Humidity, in operation	:	15% to 85% (no condensate)
Protection class	:	IP67
Weight	:	620g

4. Connection

Pin 1	L1 (+) Black	Pin 5	L1, L2, L3, N (-) Red
Pin 2	L2 (+) Black	Pin 6	Not connected
Pin 3	L3 (+) Black	Pin 7	Shielding, Bridge to Pin 5
Pin 4	(N) (+) Black		

5. Safety Standard

EN 61010-1: 2001

EN 61010-031: 2002

EN 61010-2-031: 2002


EN 61010-2-032: 2002

1000 V_{RMS}, CAT III

600 V_{RMS}, CAT IV

The usage of these Rogowski coils at uninsulated conductors is limited to voltages of max 1000 V AC_{RMS} and frequencies to 1 kHz.

6. Dimensions

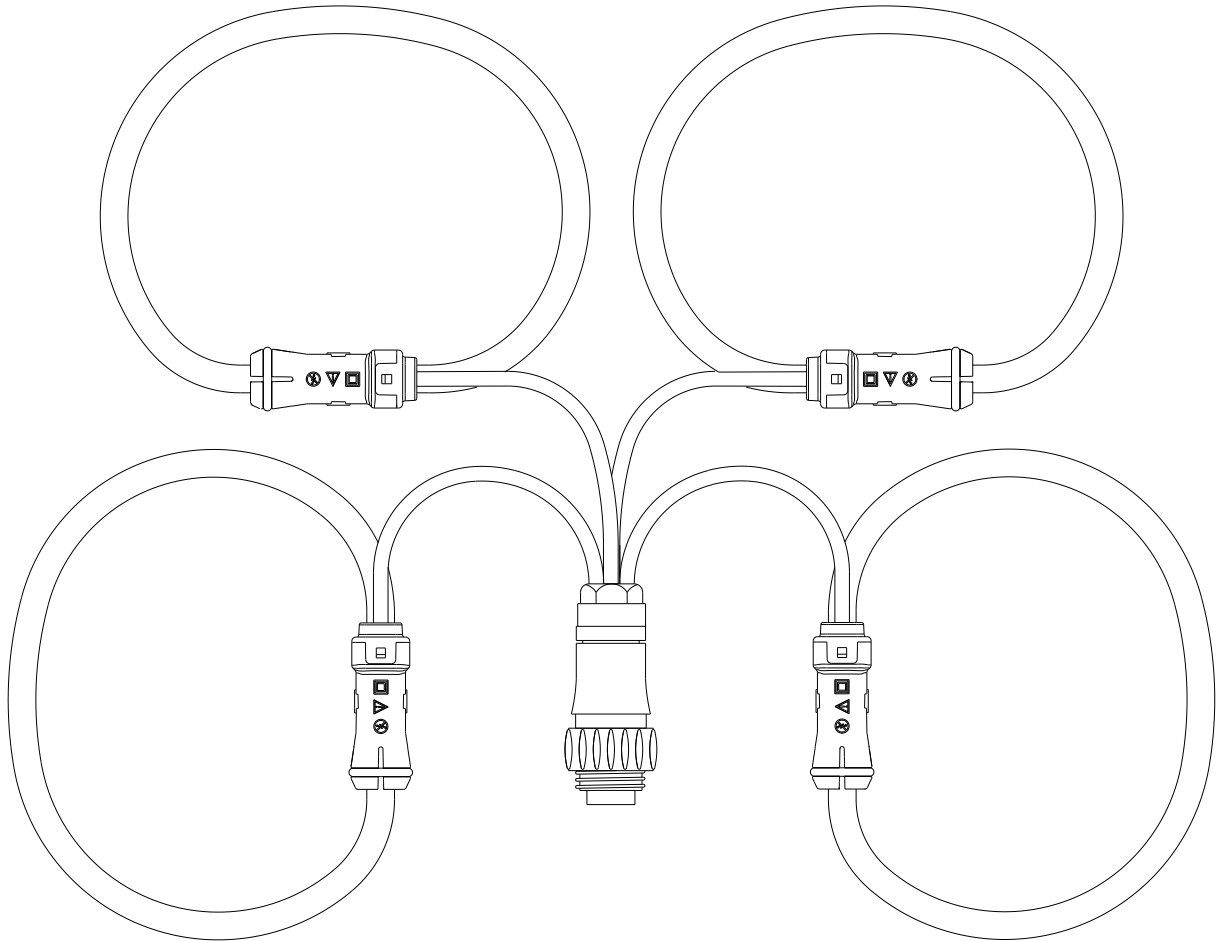

We take care of it.

7. Ordering Information

FEATURE	ORDER CODE
Rogowski coil set (4 pieces) ● Rogowski coil set (4 pieces), 1...3000A	111.7030

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/11/2020 7:42 AM

Copyright 2013 by A. Eberle GmbH & Co. KG
Subject to change without notice.